

SMD Power Inductor TMPF0606LR-Series(N)-ABD

1. Features


1. Soft saturation.
2. High current · low DCR · high efficiency.
3. Very low acoustic noise and very low leakage flux noise.
4. High reliability.
5. 100% Lead(Pb)-Free and RoHS compliant.
6. Operating temperature -40~+125°C (Including self - temperature rise)



2. Applications

Note PC power system · incl. IMVP-6
DC/DC converter .


Recommend PC Board Pattern



L(mm)	G(mm)	H(mm)
5.6 ref	2.5 ref	5.6 ref

Note: 1、 The above PCB layout reference only.
2、 Recommend solder paste thickness at 0.15mm and above.

3. Dimensions

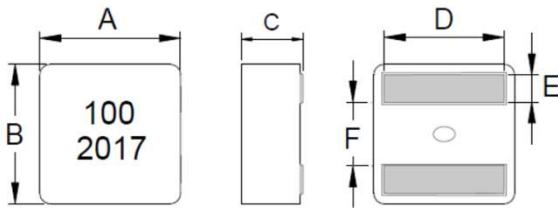


Series	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
TMPF0606LR**-ABD	7.2±0.2	6.9±0.2	5.8±0.2	5.3±0.3	1.4±0.2	2.6±0.25

4. Part Numbering



- A: Series
- B: Dimension
- C: Type
- D: Inductance
- E: Inductance Tolerance
- F: Code
- BxC
- Material.
- 100=10.0uH
- M=±20%
- Marking: Black.100 and 2017(20 YY, 17WW, follow production date).
- AB:oversize



DCR Test










5. Specification

Part Number	Inductance (uH) $\pm 20\%$ @ 0 A	I rms (A) Typ		I sat (A)		DCR (m Ω) Typ.	DCR (m Ω) Max.
		20 $^{\circ}$ C rise	40 $^{\circ}$ C rise	Typ	Max		
TMPF0606LR-1R0MN-ABD	1.00	15.0	19.0	18.0	16.0	3.9	4.29
TMPF0606LR-1R5MN-ABD	1.50	13.0	16.0	16.0	14.0	5.1	5.61
TMPF0606LR-2R2MN-ABD	2.20	11.0	14.0	14.0	12.0	7.0	7.80
TMPF0606LR-3R3MN-ABD	3.30	9.0	12.0	11.5	10.5	11.0	12.1
TMPF0606LR-4R7MN-ABD	4.70	8.0	11.0	10.5	9.5	13.1	14.4
TMPF0606LR-5R6MN-ABD	5.60	7.5	10.0	10.0	9.0	14.3	15.8
TMPF0606LR-6R8MN-ABD	6.80	7.0	9.0	9.2	8.7	18.9	20.8
TMPF0606LR-8R2MN-ABD	8.20	6.0	8.0	8.5	8.0	22.5	24.8
TMPF0606LR-100MN-ABD	10.0	5.0	7.0	7.6	6.8	26.6	29.3

Note:

1. Test frequency : L : 100KHz /0.1V.
2. All test data referenced to 25 $^{\circ}$ C ambient.
3. Testing Instrument : L: HP4284A,HP4395A,CH11025,CH3302,CH1320 ,CH1320S LCR METER / Rdc:CH16502,Agilent33420A MICRO OHMMETER,or EQU.
4. Current that causes the specified temperature rise from 25 $^{\circ}$ C ambient.
5. Saturation Current (Isat) will cause L0 to drop approximately 30%.
6. The part temperature (ambient + temp rise) should not exceed 125 $^{\circ}$ C under worst case operating conditions.Circuit design,component,PCB trace size and thickness,airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.
7. Special inquiries besides the above common used types can be met on your requirement.
8. Ratedoperatingvoltage(acrossinductor)15V ref.

6. Typical Performance Curves

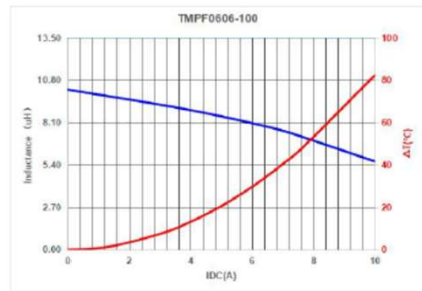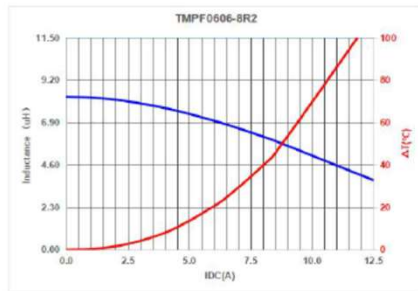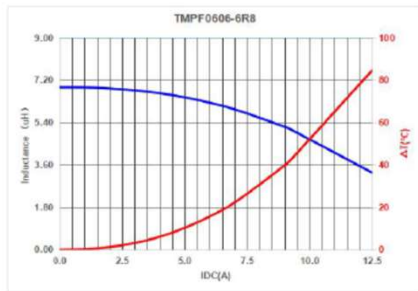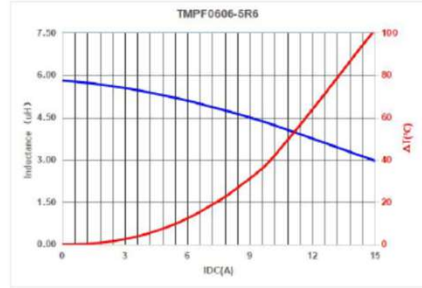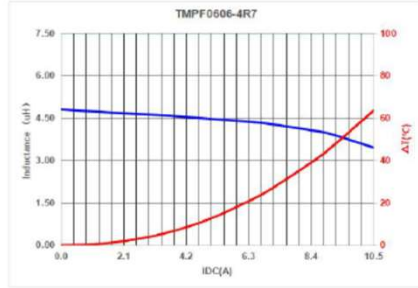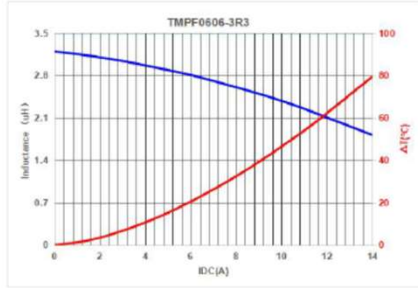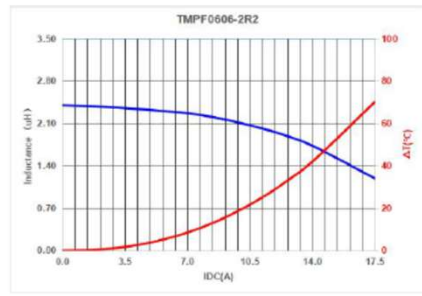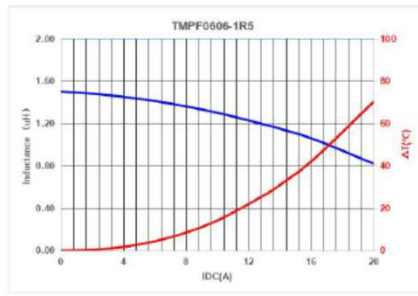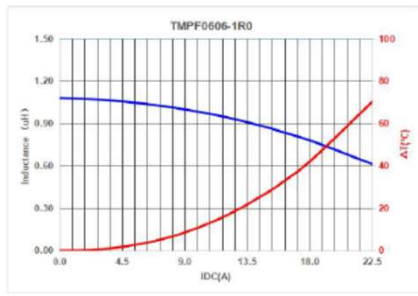

SINKA JAPAN CO.,LTD